

# SEKSTANT



colours:

**PURPOSE:** decorative lighting for galleries, shops shelvings, displays and high-class hotels. The soft light with stable, natural color temperature provides comfortable working conditions.

**HOUSING:** Precisely machined aluminium frame, powder coated in white. Optical module can be rotated in 2 axis to adjust the light direction.

**LIGHT SOURCE:** LED diodes of constant color temperature, superior performance and rated lifetime  $L_{70}$  of 50 000 hours.



**DESIGN:** R- recessed, with adjustable light direction

**POWER SUPPLY:** high efficiency switching power supply with power factor  $>0.95$  guarantees constant illuminance at voltage supply ranging from 184V~ to 253V~.



SEKSTANT is a versatile, modern and elegant LED luminaire. The light beam can be easily directed by moving head LED module.

[mm]

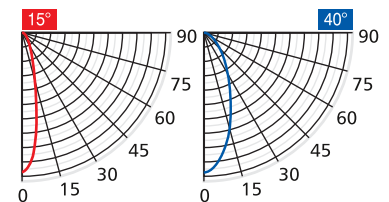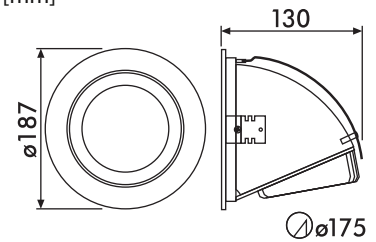

Type	Rated luminous flux of luminaire	Colour temperature	Beam angle	Rated power	CRI	Weight	Dimensions (LxWxH)
SX-20-R-35W-3040	2 100lm	warm white 3000K	40°	35W	>82	1,0kg	187x130mm
SX-20-R-35W-4240	2 400lm	neutral white 4200K	40°	35W	>84	1,0kg	187x130mm
SX-20-R-35W-3015	2 200lm	warm white 3000K	15°	36W	>82	1,0kg	187x130mm
SX-20-R-35W-4215	2 400lm	neutral white 4200K	15°	36W	>84	1,0kg	187x130mm

All technical parameters are subject to change due to technological progress.  
The appearance of the product may vary slightly from the one presented on the photo



Photometric data available on demand